


- U.S. DOE Compliant for Water and Energy Standards
- ADA Compliant
- Ultra High Efficient With High Speed Extract and Low Water Consumption

## MULTI-HOUSING

**Quantum™**  
 Commercial  
 Front Load Washer  
 Front Control - Pump Drain  
**Speed Queen®**

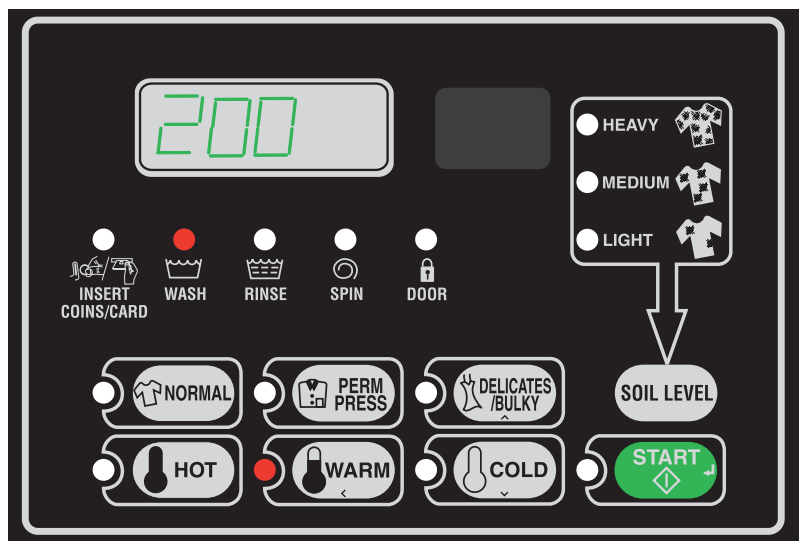

**Prep for Card**  
 ("Y")



**Prep for Coin**  
 ("X")



**Coin**  
 ("C")



ENERGY STAR® Qualified

## RELIABLE COMMERCIAL PRODUCTS

Large Door Opening  
 With Stainless Steel Hinge



Multi-Compartment  
 Supply Dispenser



- Durable Stainless Steel Washtub
- High Speed Extract of 1000 RPM Spins Clothes Out Drier
- Energy Efficient Wash Cycles
- Door Swing 180°

# QUANTUM FRONT LOAD WASHER SPECIFICATIONS

Pump Drain	SFNNYFSP 112TW01	SFNNYFJP 112TW01	SFNNXFSP 112TW01	SFNNCFSP 112TW01	SFNNCFJP 112TW01
Activation	Prep Card "Y"	Prep Card "Y"	Prep Coin "X"	Coin "C"	Coin "C"
<b>Appearance</b>					
Color - White	√	√	√	√	√
Control Panel Selection	Front	Front	Front	Front	Front
<b>Water and Energy Info</b>					
Modified Energy Factor "MEF" ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	2.46 (69.8)	2.46 (69.8)	2.46 (69.8)	2.46 (69.8)	2.46 (69.8)
Water Factor "WF" - gal/ft <sup>3</sup> (Liters/Liter/cycle)	3.83 (0.51)	3.83 (0.51)	3.83 (0.51)	3.83 (0.51)	3.83 (0.51)
Water Consumption - gal (Liter)	10.9 (41.3)	10.9 (41.3)	10.9 (41.3)	10.9 (41.3)	10.9 (41.3)
Average Hot Water - gal (Liter)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)
CEE Tier Level 3	√	√	√	√	√
EcoWatersaver™	√	√	√	√	√
<b>Technical Info</b>					
Weight - lb (kg)	250 (113)	√	√	√	√
Shipping Weight - lb (kg)	270 (123)	√	√	√	√
Electrical Requirements - 120/60/1 15 amp	√	√	√	√	√
Overall Dimensions - WxDxH in (mm) 26 7/8" (683) x 28" (711) x 43" (1092)	√	√	√	√	√
Stainless Steel Basket Volume - cu. ft. (liters)	2.84 (80)	√	√	√	√
Cycle/Temp - Normal, Perm Press, Delicate/Hot, Warm, Cold	√	√	√	√	√
Motor	1 HP 750 W	√	√	√	√
Water Pressure psi (Bar) Pressure Fill 20 to 120 psi	1.4/8.3	√	√	√	√
Spin Speeds - RPM	500, 650, 1000	√	√	√	√
Soil Level Modifiers	√	√	√	√	√
Supply Injection	√	√	√	√	√
Drain	Pump	Pump	Pump	Pump	Pump
<b>Performance/Features</b>					
Secured Automated Audits	√	√	√	√	√
Safe Door Lock Release at Cycle Completion	√	√	√	√	√
Automotive Size Shocks Enable Installation on Any Floor Type or Level	√	√	√	√	√
Agency Approval	cULus	√	√	√	√

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

