

- U.S. DOE Compliant for Water and Energy Standards
- ADA Compliant
- Ultra High Efficient With High Speed Extract and Low Water Consumption



## MULTI-HOUSING

### Micro Display

### Commercial Front Load Washer

Rear Control - Pump Drain

**Speed Queen®**

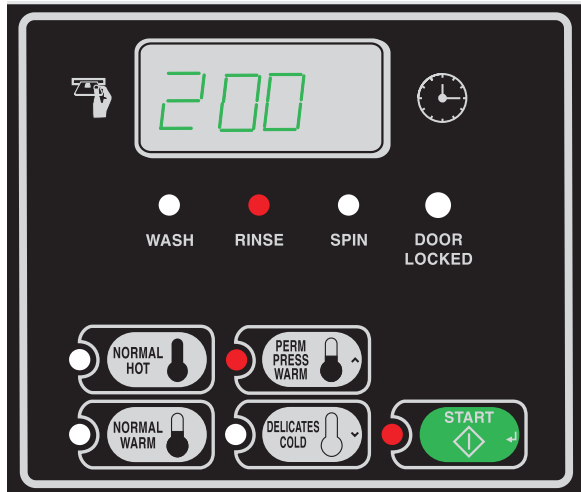

**Prep for Card**  
("Y")



**Prep for Coin**  
("X")



**Coin**  
("C")



ENERGY STAR® Qualified

## RELIABLE COMMERCIAL PRODUCTS

Large Door Opening  
With Stainless Steel Hinge



Multi-Compartment  
Supply Dispenser




- Durable Stainless Steel Washtub
- High Speed Extract of 1000 RPM Spins Clothes Out Drier
- Energy Efficient Wash Cycles
- Door Swing 180°

# MICRO DISPLAY FRONT LOAD WASHER SPECIFICATIONS

	SFNBYSRP 112TW01	SFNBXRSP 112TW02	SFNBXRSP 112TW01	SFNBCRSP 112TW02	SFNBCRSP 112TW01
<b>Activation</b>	Prep Card "Y"	Prep Coin "X"	Prep Coin "X"	Coin "C"	Coin "C"
<b>Appearance</b>					
Color - White	√	√	√	√	√
<b>Control Panel Location</b>	Rear	Rear	Rear	Rear	Rear
<b>Water and Energy Info</b>					
Modified Energy Factor "MEF" ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	2.20 (62.30)	2.20 (62.30)	2.20 (62.30)	2.20 (62.30)	2.20 (62.30)
Water Factor "WF" - gal/ft <sup>3</sup> (Liters/Liter/cycle)	4.5 (0.60)	4.5 (0.60)	4.5 (0.60)	4.5 (0.60)	4.5 (0.60)
Water Consumption - gal (Liter)	10.4 (39.5)	10.4 (39.5)	10.4 (39.5)	10.4 (39.5)	10.4 (39.5)
Average Hot Water - gal (Liter)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)	0.9 (3.4)
CEE Tier Level 2	√	√	√	√	√
EcoWatersaver™	√	√	√	√	√
<b>Technical Info</b>					
Weight - lb (kg)	240 (109)	√	√	√	√
Shipping Weight - lb (kg)	260 (118)	√	√	√	√
Electrical Requirements	120/60/1-15 amp	√	√	√	√
Overall Dimensions - WxDxH in (mm) 26 7/8" (683) x 28" (711) x 43" (1092)	√	√	√	√	√
Stainless Steel Basket Volume - cu. ft. (liters)	2.84 (80)	√	√	√	√
Cycle/Temp - Normal/Hot, Perm Press/Warm, Delicate/Cold	√	√	√	√	√
Motor	1 HP 750 W	√	√	√	√
Water Pressure psi (Bar) Pressure Fill 20 to 120 psi - 1.4/8.3	√	√	√	√	√
Spin Speeds - RPM	500, 650, 1000	√	√	√	√
High Capacity Meter Case - Ht 43 7/8" (1114)	√	√	√	√	√
Drain	Pump	Pump	Pump	Pump	Pump
<b>Performance/Features</b>					
Extra-Large Capacity	√	√	√	√	√
Freestanding Front Load Washer	√	√	√	√	√
Agency Approval	cULus	√	√	√	√

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

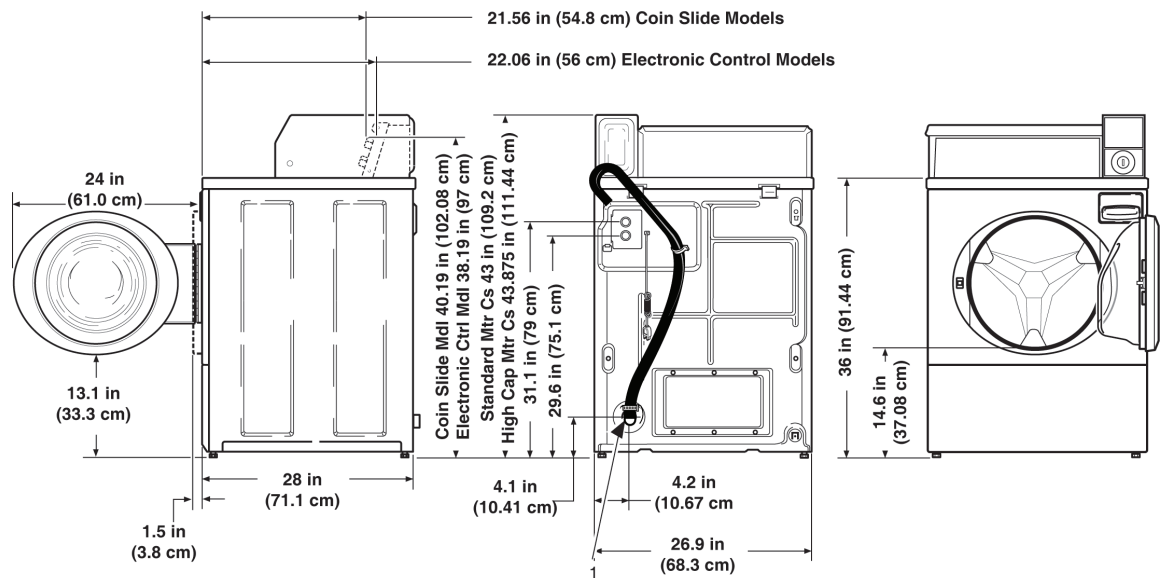

\*With leveling legs turned into base

1 = 1.5 in (3.81 cm) Inside Diameter  
1.86 in (4.72 cm) Outside Diameter

